

## XL-504RGBC-KS F5七彩长脚透明快闪

## 技术数据表 Technical Data Sheet

### 特点 (characteristic) :

\* 外观尺寸: F5/5.9\*5.0\*8.6\*29mm

Appearance dimension:F5/5.9\*5.0\*8.6\*29mm

\* 发光颜色及胶体:高亮RGB/透明胶体

Luminous color and colloid: Highlight RGB/Transparent colloid

\* 环保产品, 符合ROHS要求

Environmentally friendly products, meeting ROHS requirements

\* 湿气敏感性等级 (MSL) :2级

Moisture sensitivity level (MSL) : 2 levels

\* EIA规范标准包装

EIA standard packaging

\* 使用寿命长

Long operating life

\* 高效、启动快

High energy efficiency, fast startup



模型图仅供参考

### 应用领域 (product application) :

\*立体发光字

Channel lettering;

\*招牌

Sign;

\*标识

Identifying;

\*广告灯箱

Advertising light box;

\*照明灯饰

Lighting decoration;

\*特殊服饰

Special clothing;

\*工艺品

Arts and Crafts:



---

目录

Catalogue

---

电性参数  
Electrical Characteristics.....3

典型特性曲线  
Typical Characteristic Curves.....5

外形尺寸  
Outline Dimensions.....7

包装  
Packaging..... 8

使用注意事项  
Precautions..... 9

## 电性参数

### Electrical Characteristics

#### 极限参数 (Absolute Maximum Ratings) (Ta=25°C)

项目参数Parameter	符号Symbol	数值Value	单位Unit
最大功耗 (Max Power Dissipation)	PM	200	mW
最大正向电流 (Max Continuous Forward Current)	IF	40	mA
最大反向电压 (Max Reverse Voltage)	VRM	5	V
正向脉峰值电流 (Peak Forward Current)	IFP	100	mA
闪光频率 (Flash Frequency)	FREQ	1.07±30%	Hz
工作环境 (Operating Temperature Range)	T OPR	-20 ~ +85	°C
储存温度 (Storage Temperature Range)	T STR	-40 ~ +85	°C
焊接条件 Welding conditions	Tsol	波峰焊 (reflow soldering) : 240°C, ≤6s 手动焊 (manual welding) : 300°C, 3s 焊接点离胶体底部在2.0mm以上	


光电参数 (Ta=25°C) Optical-electrical parameter (ta=25 °C)

参数名称 Parameter	符号 Symbol		数值Rating			单位 Unit	测试条件 Test conditions
			最小Min	平均Typ	最大Max		
工作电压 Working Voltage	VF		2.0	---	5.0	V	/
光强 light intensity	Iv	R	---	600	---	mcd	IF=20mA
		G	---	1300	---	mcd	IF=20mA
		B	---	700	---	mcd	IF=20mA
主波长 Dominant wavelength	$\lambda_d$	R	620	---	625	nm	IF=20mA
		G	515	---	530	nm	IF=20mA
		B	460	---	475	nm	IF=20mA
峰值波长 Peak wavelength	$\lambda_p$	R	---	625	---	nm	IF=20mA
		G	---	530	---	nm	IF=20mA
		B	---	470	---	nm	IF=20mA
半波宽 Half wave width	$\Delta\lambda$	R	---	20	---	nm	IF=20mA
		G	---	30	---	nm	IF=20mA
		B	---	25	---	nm	IF=20mA
反向电流 Reverse current	Ir		---	---	5	$\mu\text{A}$	$V_r=5\text{V}$
半光强视角 Half light angle	2 $\theta$ 1/2		---	120	---	Deg	IF=20mA
闪烁周期 Flicker period	T		---	5	---	S	IF=20mA


典型特性曲线

Typical Characteristics Curves


闪光曲线图 (Flash diagram) :

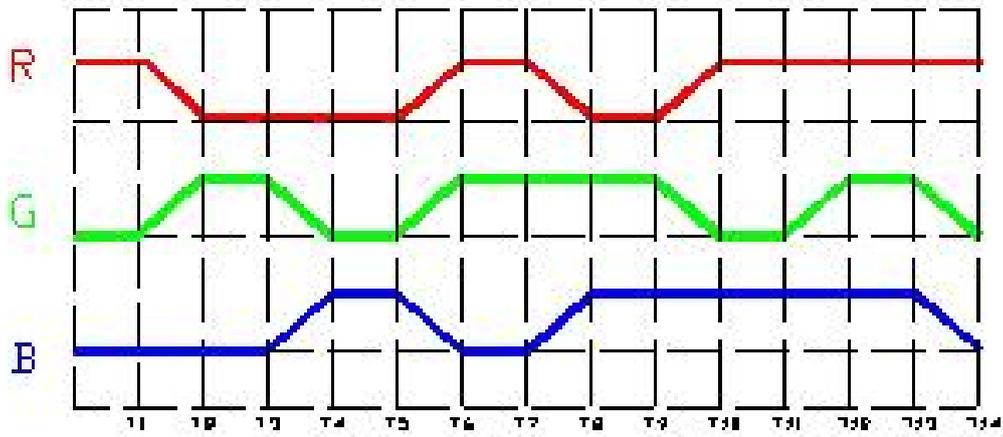


光谱分布曲线  
Relative Spectral Distribution

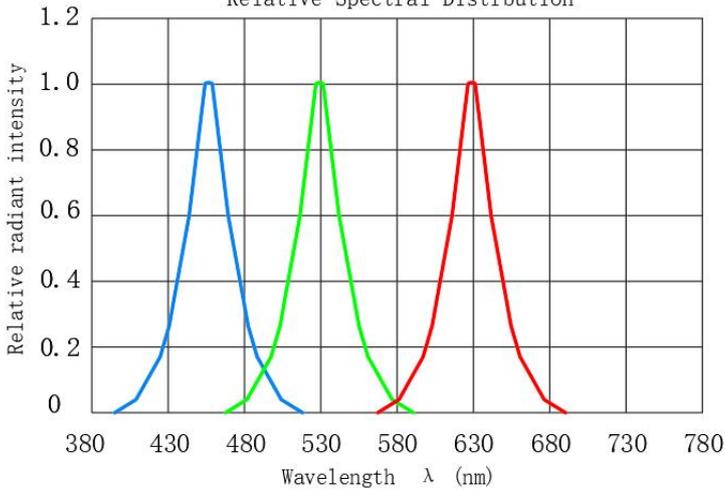


伏安特性  
Volt ampere characteristic

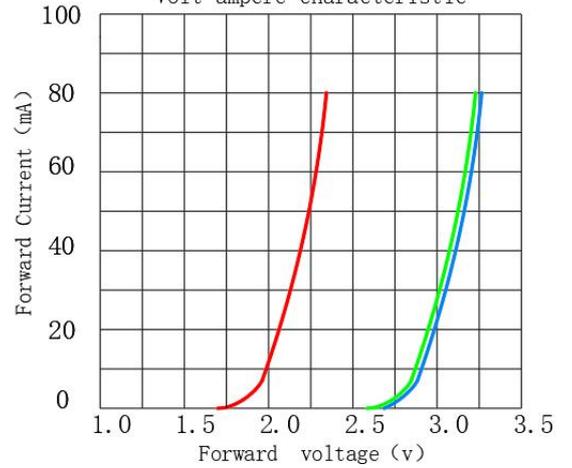


正向电流降额曲线  
Forward current derating curve

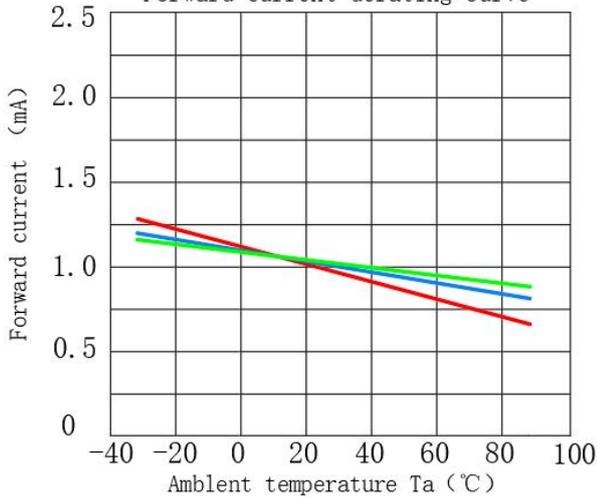


相对光强与正向电流特性  
Relative Luminous VS Forward Current

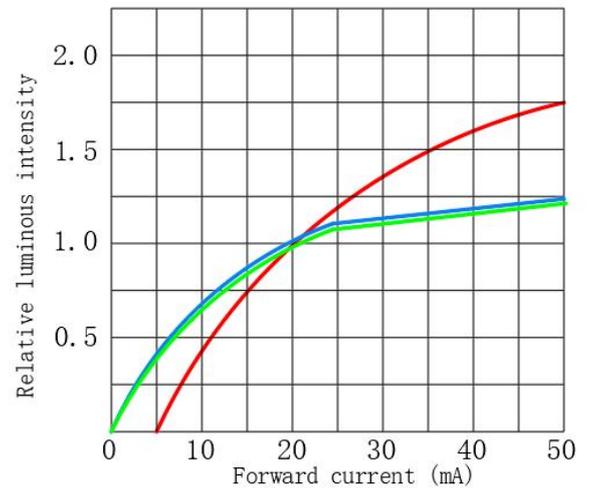

光强与环境温度曲线  
Luminous Intensity VS Ambient Temperature

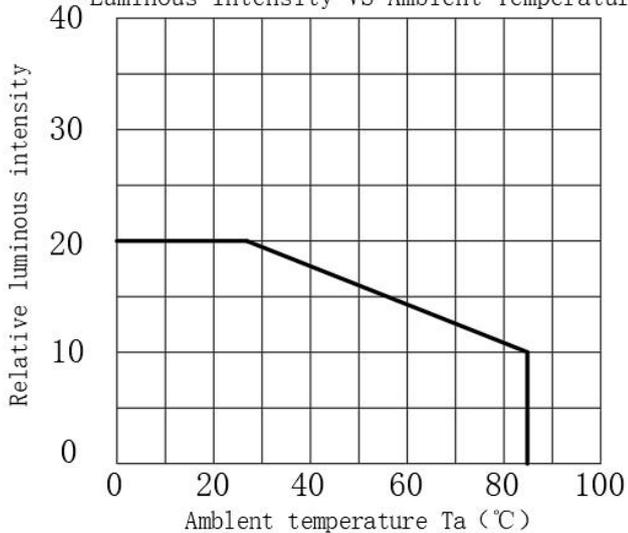

相对辐射强度与空间角度关系  
Radiation diagram

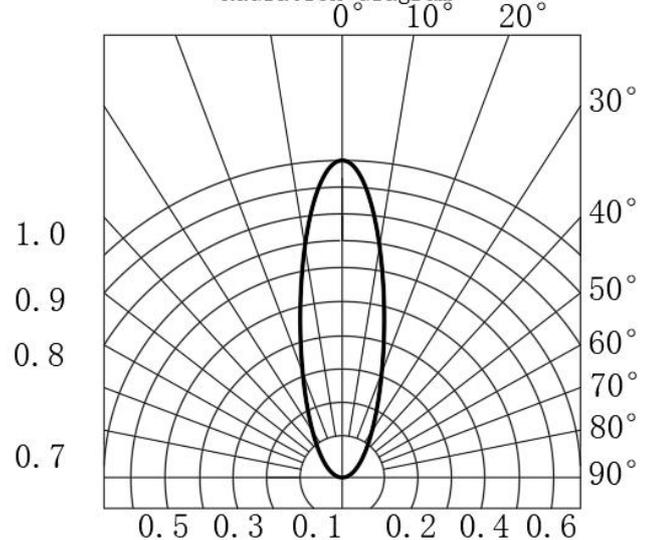



## 包装 (1)


### Packaging (1)

\*袋装

In Bags

\*防潮防静电包装

Moisture Proof and Anti-Electrostatic Foil Bag

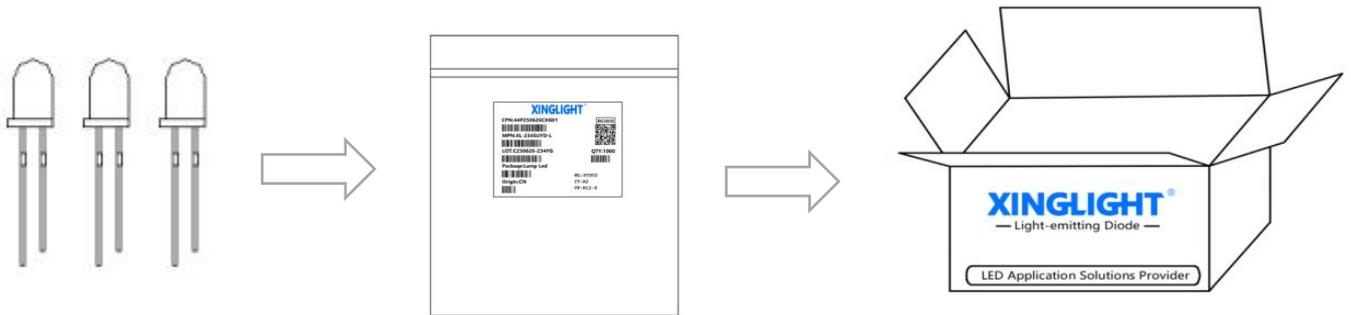

### ◇ 标签说明 Label Expantion

CPN: 批号/档位	LOT: 日期/封装颜色
MPN: 型号	VF: 电压代码
WL: 波长代码	IV: 亮度代码
ORIGIN: 产地	QTY: 数量
PACKAQE: 封装	



## 使用注意事项 (1)

### Precautions (1)

#### 1. 应用 APPLY

此LED可使用于一些普通的电子设备，例如办公设备，通信设备、房屋装饰，若LED用在一些可靠性要求较高的情况下，如航空运输，交通控制及医辽器械时，一定需参考销售提供之资料进行使用。

This LED can be used in some ordinary electronic equipment, such as office equipment, communication equipment, house decoration, if LED is used in some high reliability requirements, such as air transportation, traffic control and medical liao equipment, must refer to the information provided by sales.

#### 2. 储存 Keep in storage

贮存LED的环境，温度不超过30℃，相对湿度不超过70%。建议LED在原包装箱里日期不超过三个月 进行使用，如果需加长贮存时间，建议放在干燥箱内，并加放干燥剂，或者充入氮气。

Storage environment of LED with temperature not exceeding 30°C and relative humidity not exceeding 70%. It is recommended that LDE be used in the original box for no more than three months. If longer storage time is required, put it in the drying box and add desiccant or filled with nitrogen.

#### 3. 清洗 Clean

当用化学品清洗胶体时必须特别小心，因为有些化学品对胶体表面有损伤并引起褪色如三氯乙烯、丙、酮等。可用乙醇擦拭、浸渍，时间在常温下不超过3分钟。

Special care must be taken when cleaning colloids with chemicals, as some chemicals have damage to the colloidal surface and cause fading such as trichloroethylene, propylene, ketone, etc. It can be wiped and soaked with ethanol for no more than 3 minutes at room temperature.

#### 4. 引脚配置 Feet assembly

- (1) 必需离胶体2毫米才能折弯支架。

It must be 2 mm from the colloid to bend the bracket.

- (2) 支架成形必须用夹具或由专业人员来完成。

Support forming must be done with fixtures or by a professional.

- (3) 支架成形必须在焊接前完成。


Support forming must be completed before welding.

- (4) 支架成形需保证引脚和间距与线路板上的一致。

The pins and spacing are the same as on the circuit board.

- (5) 焊接必须在正常温度下进行，当LED正常焊接到PCB板上后，应尽量避免在LED引脚处施加机械压力。

Welding must be performed at normal temperature and when LED is normally welded to the PCB plate, avoid applying mechanical pressure at LED pins at a minimum.

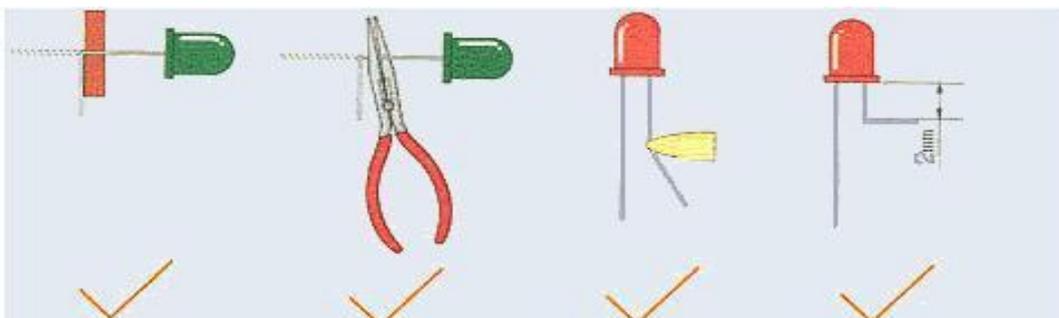


## 使用注意事项 (2)

### Precautions (2)

#### 5. 焊接 Weld

当焊接时，必需在胶体底部2mm以下进行焊接，在焊接时，应尽力避免浸渍LED胶体，在刚焊接完后，应避免在引脚上加外力或者摇动LED胶体。

When welding, welding must be conducted below 2mm of colloid bottom. When welding, try to avoid soaking LED colloid. After welding, avoid adding external force on the pin or shaking LED colloid.

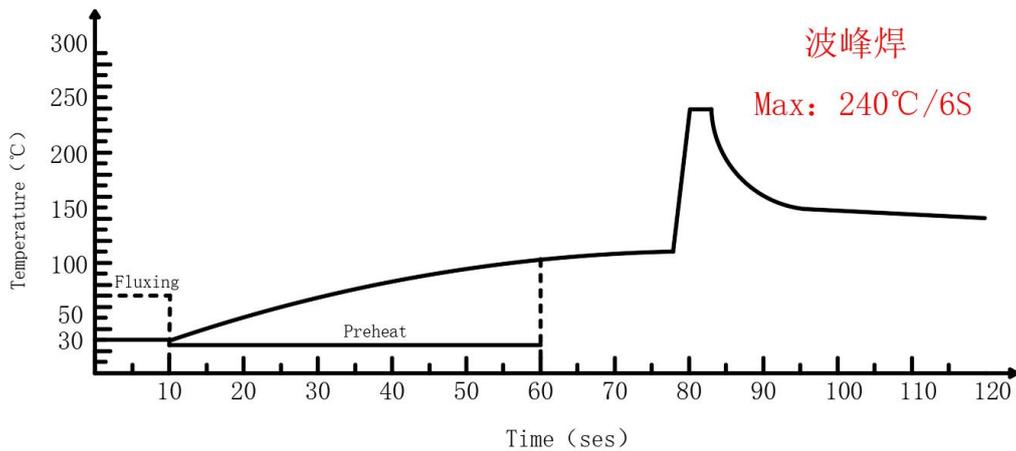


#### 6. 驱动方式 Drive way


LED的当前驱动方式，若LED为多颗并联时，建议采用线路A，在每颗LED，处加一限流电阻，以保证LED之亮度一致。

In the current driving mode of LED, if LED is multiple in parallel, it is recommended to use line A and add a flow limit resistance to each LED to ensure the consistent brightness of LED.

Circuit model A

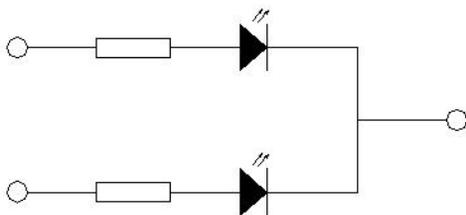

Circuit model B

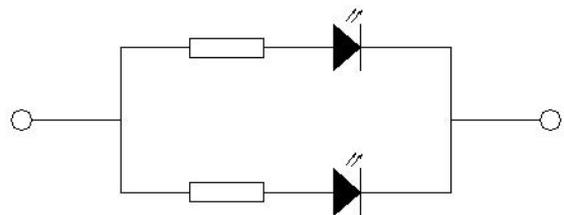

#### 7. 静电防护 Electrostatic protection

静电和电流的急剧升高将会对LED产生损害，InGaN系列产品使用时请使用防静电装置，如防护带和手套注意：使用时人体放电模式HBM<1000V；机器放电模式<100V。

High increase of static electricity and current will damage LED. Use antistatic devices such as protective belts and gloves. Note: human discharge mode HBM <1000V; machine discharge mode <100V.

## 使用注意事项 (3)

### Precautions (3)

#### 8、其他事项:

##### Others:

\*直接用手拿取产品不但会污染封装树脂表面,也可能由于静电等因素导致产品性能的改变。过度的压力也可能直接影响封装内部的管芯和金线,因此请勿对产品施加过度压力,特别当产品处于高温状态下,例如在回流焊接过程中。

\*When handling the product, touching the encapsulant with bare hands will not only contaminate its surface, but also affect on its optical characteristics. Excessive force to the encapsulant might result in catastrophic failure of the LEDs due to die breakage or wire deformation. For this reason, please do not put excessive stress on LEDs, especially when the LEDs are heated such as during Reflow Soldering.



\*LED 的环氧树脂封装部分相当脆弱,请勿用坚硬、尖锐的物体刮、擦封装树脂部分。在用镊子夹取的时候也应当小心注意。

\*The epoxy resin of encapsulant is fragile, so please avoid scratch or friction over the epoxy resin surface. While handling the product with tweezers, do not hold by the epoxy resin, be careful.

#### 9、眼睛保护忠告:

##### Safety Advice For Human Eyes

\*LED 发光时,请勿直视发光光源,特别是对于一些光强较高的 LED,强光可能伤害你的眼睛。

\*Viewing direct to the light emitting center of the LEDs, especially those of great Luminous Intensity, will cause great hazard to human eyes. Please be careful.

规格书如有修改,不另行通知

If there are any modifications to the specification sheet, no further notice will be given