Product packaging logic diagram

DIP4



SMD4

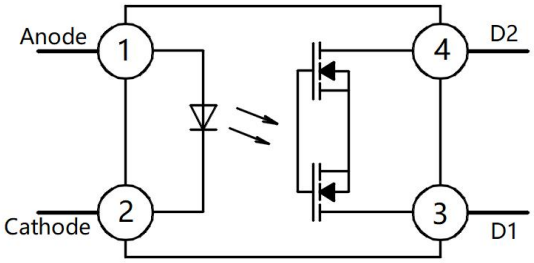

Pin Configuration

Features

- Normally open, single pole single throw
- Control 400VAC or DC voltage
- High isolation voltage between input and output (Viso =5000V rms)
- High sensitivity, low ON resistance
- Low-level off-state leakage current
- Operating Temperature: -40℃~85℃
- Environmentally friendly products, compliant with CQC, UL, and VDE requirements

Mechanical Data

- Case: DIP4、SMD4
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solder ability-per MIL-STD-202, Method 208

Applications

- In industrial control systems, optocoupler relays are commonly used for the control and monitoring of machinery and equipment.
- In household appliances and consumer electronics, optocoupler relays are used for power Management. Overcurrent protection and safe isolation between devices
- In the field of communications, optocoupler relays are used for data transmission, signal amplification, and signal isolation.
- In medical electronic devices, optical couplers are used for electrical isolation and signal transmission. to ensure the safety of patients and operators
- Optocoupler relays are used in automotive electronic systems to control various onboard devices。Improve system stability and security
- In the field of new energy,Battery management system for electric vehicles(BMS),For detection and troubleshooting.

Ordering Information

XL	640A	(M)	(G)	-	(U)	(N)	(Y)
①	②	③	④		⑤	⑥	⑦

① Brand(XL)

② Product series(640A)

③ Package type(DIP4:None, ,SMD4: A)

④ Halogen option(None :Halogen free)

⑤ Lead frame (None: Copper)

⑥ Customer option 1 (0-9 or A-Z or none)

⑦ Customer option 2 (0-9 or A-Z or none)

Part Number	Package	Shipping Quantity	Marking Code
XL640A	DIP4	100pcs/Tube	XL640A
XL640AA	SMD4	2000pcs / Tape & Reel	XL640A

Marking Information

- " XL" denotes brand.
- " 640A" denotes Product series.
- " Y" denotes Year : A(2024), B(2025), C(2026)
- " WW" denotes Week' s number .
- " N" denotes the day of Week.

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter		Symbol	Value	Unit
Input	Forward Current	I_F	50	mA
	Peak Forward Current *1	I_{FP}	1	A
	Reverse Voltage	V_R	5	V
	Power Dissipation	P_D	75	mW
Output	Load Voltage (peak AC)	V_L	400	V
	Continuous load current (peak AC)	I_L	0.12	A
	Peak load current*2	I_{peak}	0.3	A
	Power Dissipation	P_{out}	500	mW

Thermal Characteristics

Parameter	Symbol	Value	Unit
Isolation Voltage *3	V_{ISO}	5000	Vrms
Operating Temperature	T_{OPR}	-40 ~ +85	°C
Storage Temperature Range	T_{STG}	-40 ~ +100	°C

Notes:

1. Pulse width≤1μs, Duty ratio: 0.001
2. 100 ms (1 shot), VL= DC
3. 40 to 60% RH, AC for 1 minute

Electrical Characteristics (@ T_A = 25°C unless otherwise specified)

Parameter		Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input	LED turn on current	I_{Fon}	I_L=0.12A	-	0.6	3	mA
	LED turn off current	I_{Foff}	I_L=0.12A	0.1	0.5	-	mA
	LED dropout voltage	V_F	I_F=5mA	1	1.3	1.5	V
Output	On resistance	R_{on}	I_F=5mA, I_L=0.12A, Within 1s on time	-	13	20	Ω
	Off state leakage current	I_{Leak}	I_F=0mA , V_L=400V	-	-	1000	nA
Transfer Characteristics	Turn on time	T_{on}	I_F=5mA, I_L=0.12A	10	110	2000	us
	Turn off time	T_{off}	I_F=5mA, I_L=0.12A	10	220	1000	us
	I/O capacitance	C_{iso}	f=1MHz, V_B=0		0.8	1.5	pF
	Initial I/O isolation resistance	R_{iso}	500V DC	1,000	-	-	MΩ

Note:

Recommended LED Forward Current IF=5 to 10mA.

Ratings and Characteristics Curves (@ T_A = 25°C unless otherwise specified)

Fig.1 Load current vs. Ambient temperature characteristics

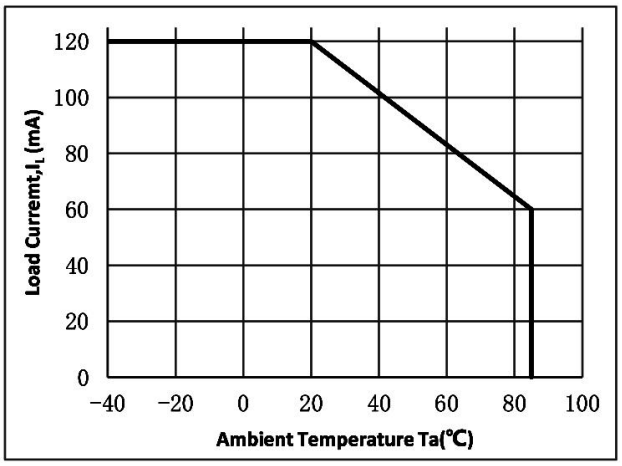

Fig.2 On resistance vs. Ambient temperature characteristics

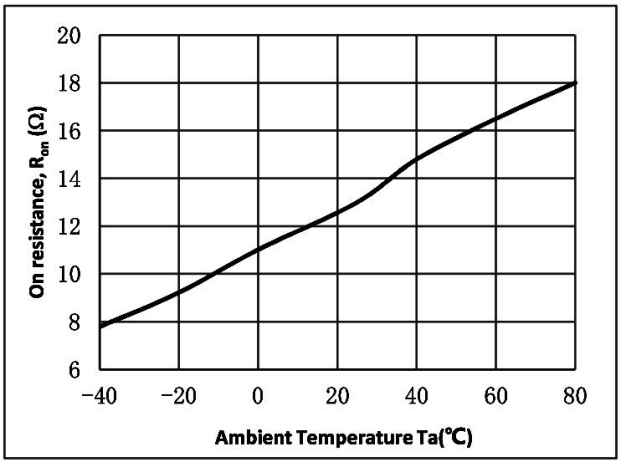

Fig.3 Turn on time vs. Ambient temperature characteristics

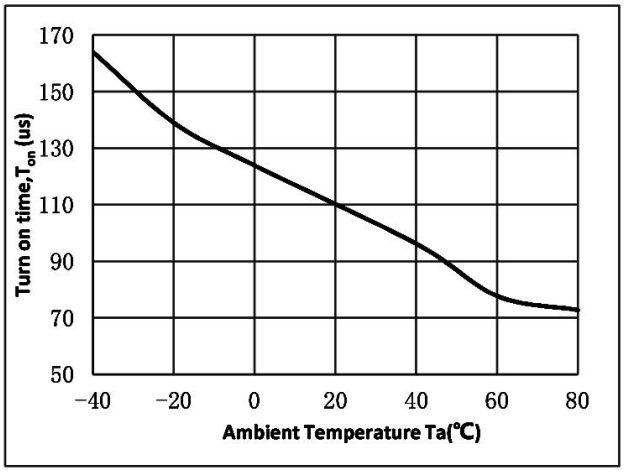

Fig4 Turn off time vs. Ambient temperature characteristics

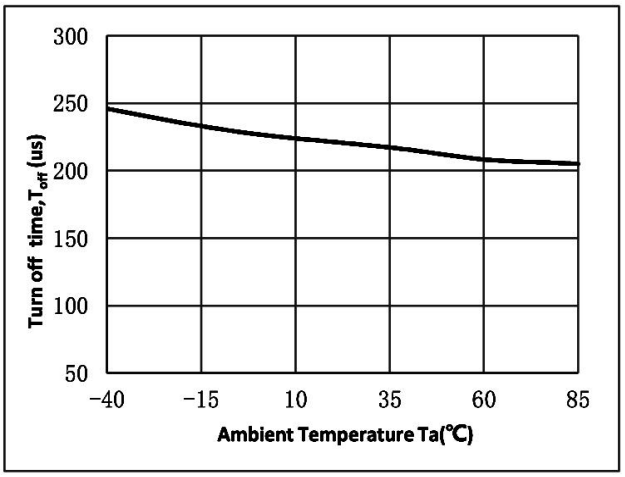

Fig.5 LED turn on current vs. Ambient temperature characteristics

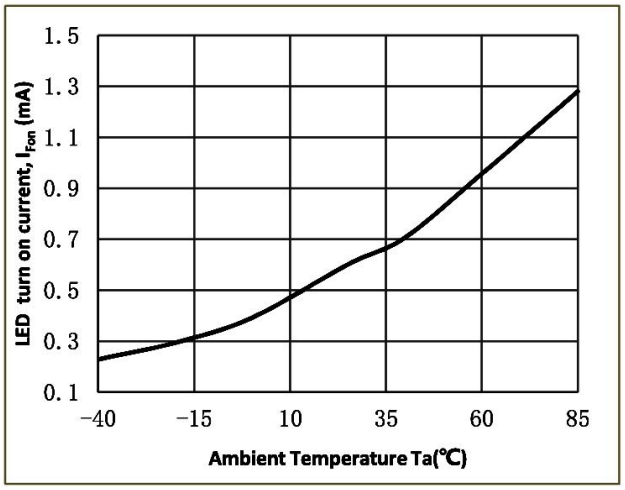

Fig.6 LED turn off current vs. Ambient temperature characteristics

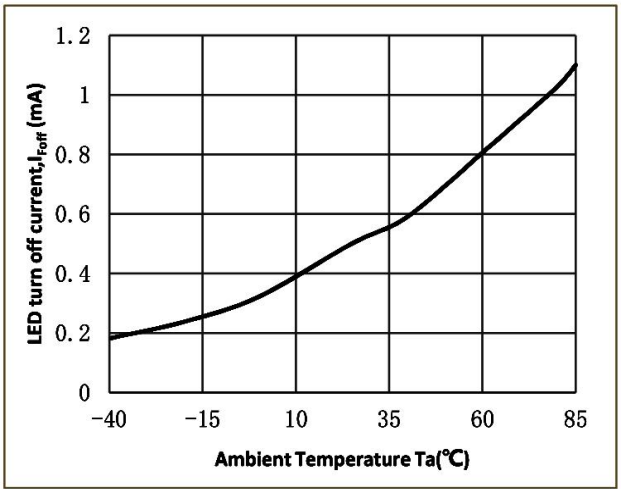

Ratings and Characteristics Curves (@ T_A = 25°C unless otherwise specified)

Fig.7 LED dropout voltage vs. Ambient temperature characteristics

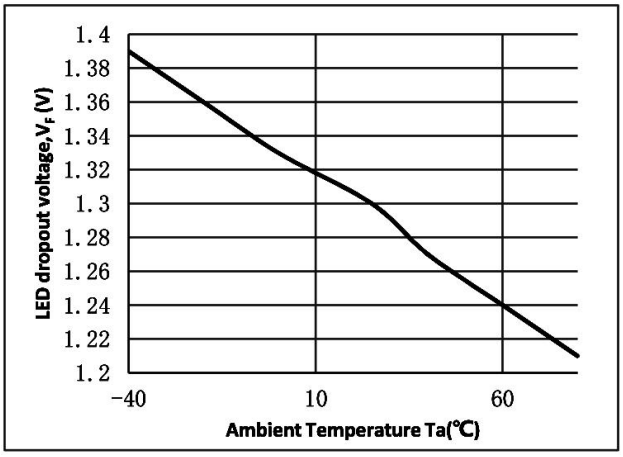

Fig.8 Output current vs Output voltage

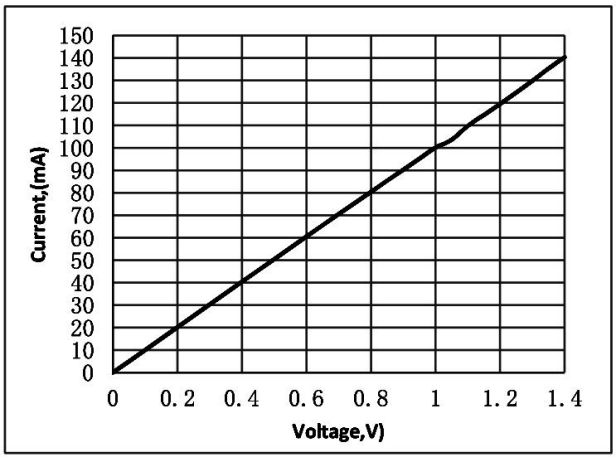

Fig.9 Off state leakage current vs Load voltage characteristics

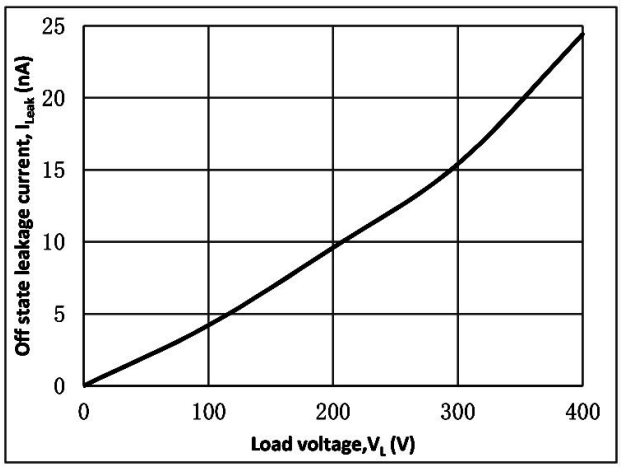

Fig.10 LED turn on time vs Forward current characteristics

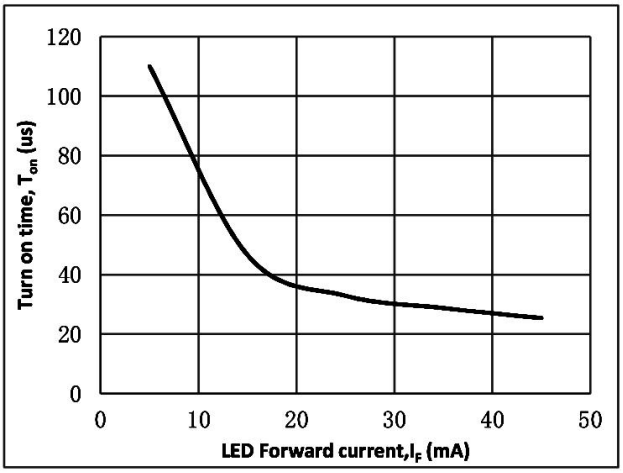

Fig.11 LED turn off time vs Forward current characteristics

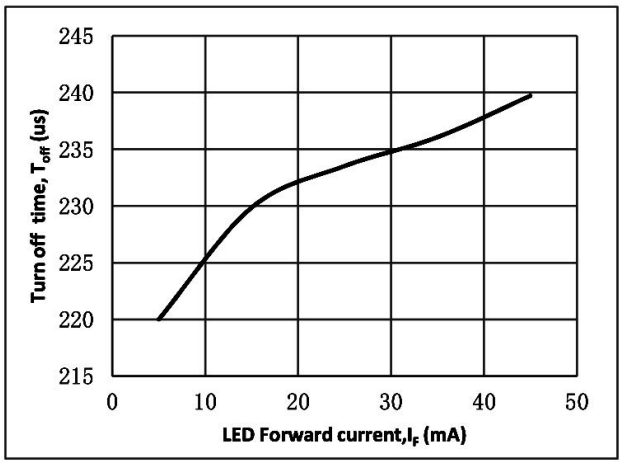

Fig.12 Turn on/off time

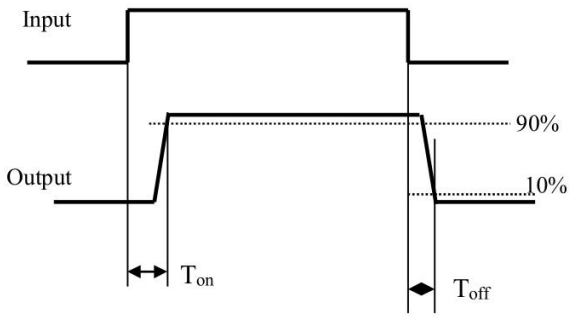

Package Outline Dimensions (unit: mm)

DIP4

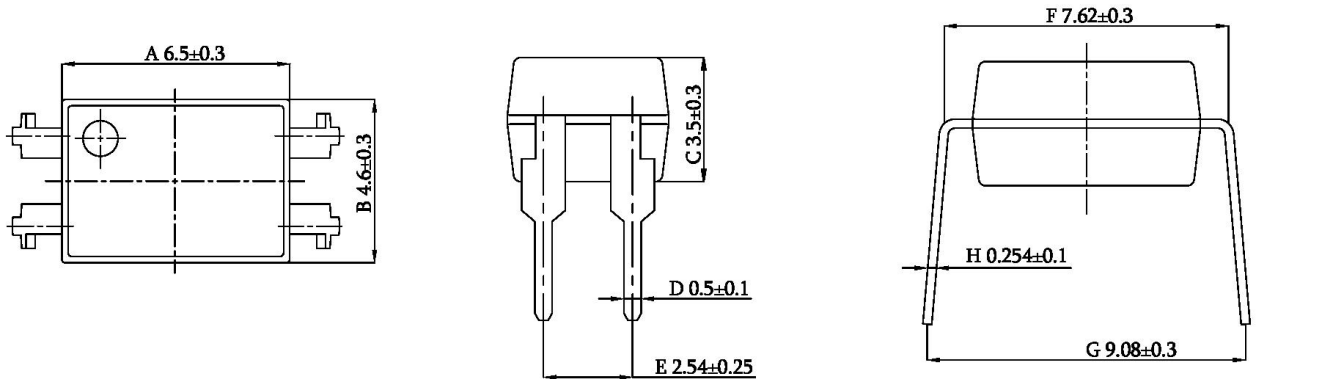

SMD4

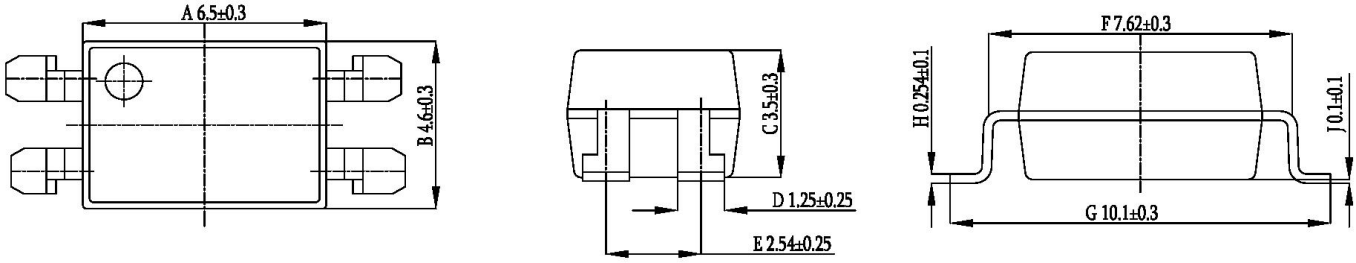

SOLDERING FOOTPRINT (unit: mm)

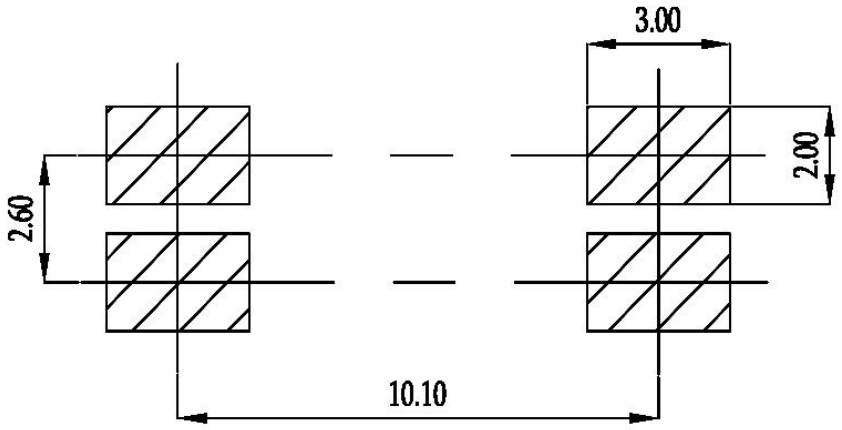

Reflow soldering

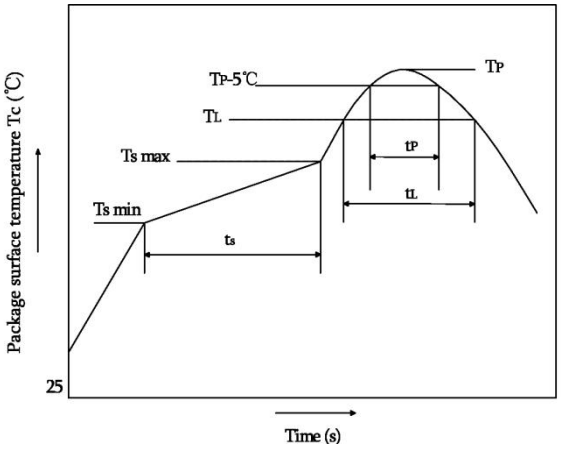

	Symbol	Min	Max	Unit
Preheat temperayure	Ts	150	200	℃
Preheat time	ts	60	120	s
Ramp-up ratea(T_L to T_P)			3	℃/s
Liquidus temperature	T_L	217		℃
Time above T_L	t_L	60	150	s
Peak temperature	Tp		260	℃
Time during which Tc is between (T_P-5) and T_P	t_p		30	s
Ramp-down rate(T_P to T_L)			6	℃/s

Note:

Reflow soldering is recommended at the temperatures and times shown, no more than three times.

Wave soldering

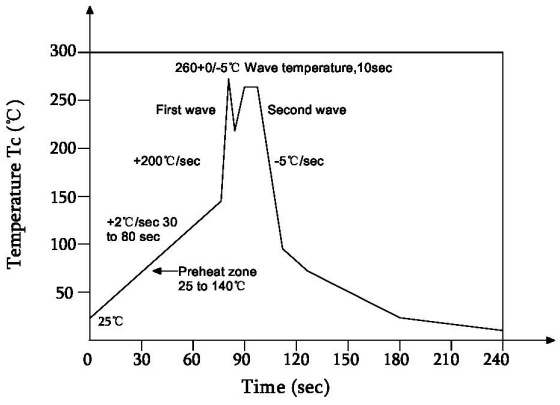

Profile feature	
Average ramp-up rate	~200℃/s
Heating rate during preheat	1℃/s to 2℃/s typical;4℃/s maximum
Final preheat temperature Ts	~130℃
Preheat time (25℃ to Ts)	>60s
Peak temperature Tp	260℃
Time within peak temperature tp	10s
Ramp-down rate	5℃/s maximum

Soldering with hand soldering iron

A. Hand soldering iron is only used for product rework or sample testing.

B. Hand soldering iron requirements:Temperature:360 ℃+5℃ within 3s.

Packing

Package Type	Packing Form	Quantity per Tube &Reel	Quantity per Box	Quantity per Carton	Antistatic Bag Specification	Box Specification	Carton Specification	Note
DIP4	Tube(500mm)	100 pcs/tube	25 tubes /box	12 boxes /ctn	190*670mm	520*105*50mm	545*372*235mm	Straight insert type material tube
SMD4	Reel(ϕ330mm)	2000 pcs/reel	2 reels /box	5 boxes /ctn	380*420mm	350*340*60mm	365*330*370mm	Guard band 200mm /min.

■ Summary table

■ DIP4 (Tube)

Qty/tube: 100pcs. Qty/box: 2500pcs.

Qty/ctn : 30000pcs.

Schematic: (unit:mm)

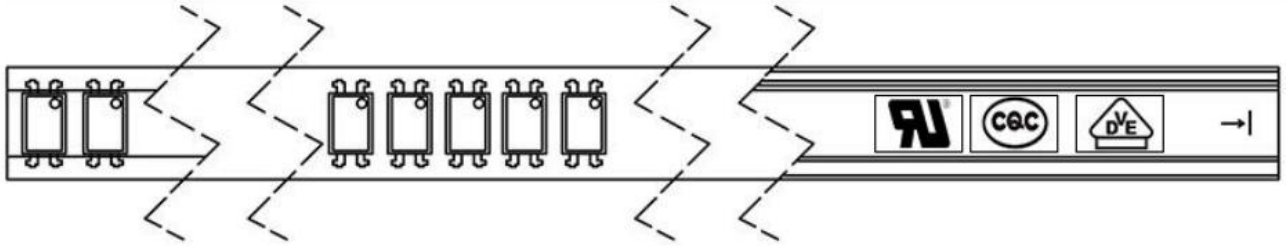

■ SMD4 (Reel)

Qty/reel: 2000pcs. Qty/box: 4000pcs.

Qty/ctn : 20000pcs.

Schematic: (unit:mm)

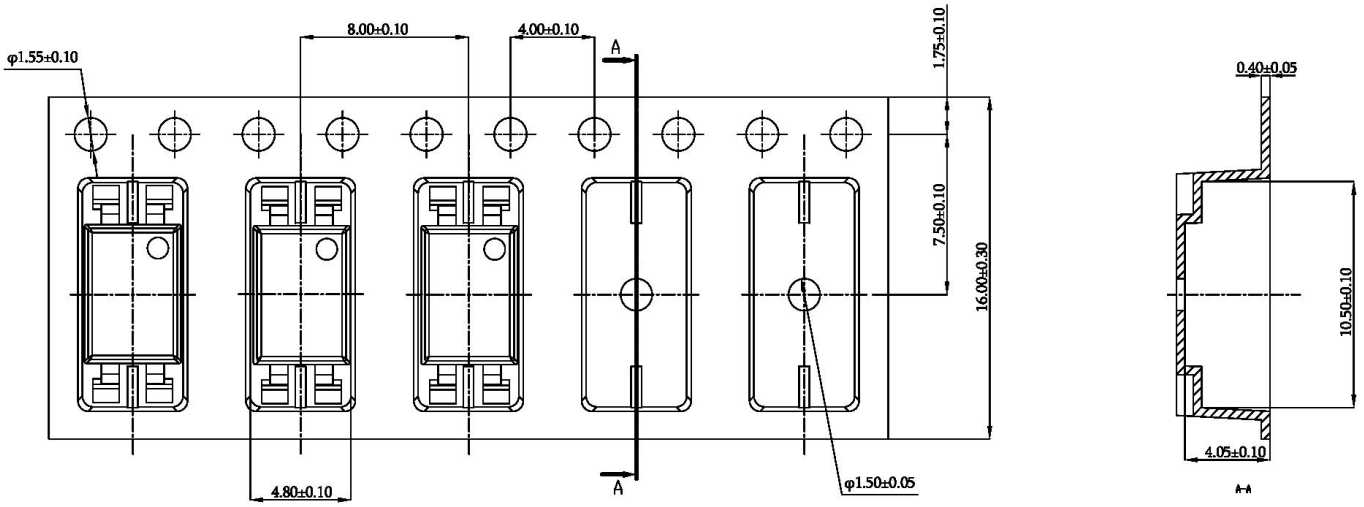

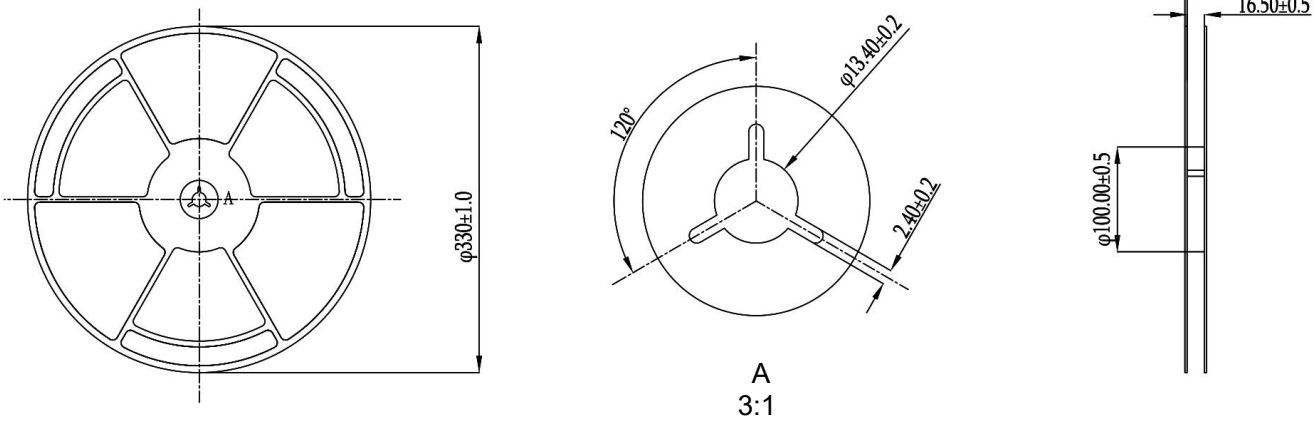

A
3:1

IMPORTANT NOTICE

XINGLIGHT reserves the right to make changes without further notice to any product herein to make corrections, modifications , improvements , or other changes. XINGLIGHT does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others .