

XL-DZ324SURUGW/B

技术数据表 Technical Data Sheet

F3MM 红翠绿双色灯座 共阳

特点 (characteristic) :

- * 外观尺寸7.0*5.0*9.0mm

Appearance dimension : 7.0*5.0*9.0mm

- * 发光颜色及胶体: 红绿双色色/雾状胶体

Luminous color and colloid: red green dual colloid / colloid

- * 环保产品, 符合ROHS要求

Environmental protection products meet ROHS requirements

- * 湿气敏感性等级 (MSL) :2级

Moisture sensitivity level (MSL) : 2levels

- * EIA规范标准包装

EIA standard packaging

- * 使用寿命长

Long operating life

- * 降低维护成本

Reduced maintenance costs

- * 高能效、启动快

High energy efficiency, fast startup



模型图仅供参考

应用领域 (product application)

- * 物联网

Internet of Things

- * 医疗

medical treatment

- * 转换器

converter

- * 存储服务器和通信

Storage servers and communication

- * 状态指示器

Status indicator

- * 电子测试仪器

Electronic testing instruments



目录
Catalogue

电性参数
Electrical Characteristics.....3

典型特性曲线
Typical Characteristic Curves.....6

外形尺寸
Outline Dimensions.....9

包装
Packaging.....10

使用注意事项
Precautions.....11

电性参数

Electrical Characteristics

极限参数（Absolute Maximum Ratings）（Ta=25℃）

项目参数 Parameter	符号 Symbol	数值 Value		单位 Unit
最大功耗（Max Power Dissipation）	PD	R	50	mW
		G	75	
最大正向电流（Max Continuous Forward Current）	IF	R	20	mA
		G	20	
最大脉冲峰值电流（Peak Forward Current）	IFP	R	80	mA
		G	80	
最大反向电压（Max Reverse Voltage）	VR	5		V
抗静电能力（Antistatic ability ）	ESD	2000		V
工作环境（Operating Temperature Range）	TOPR	-40 ~ +85℃		℃
储存温度（Storage Temperature Range）	TSTR	-40 ~ +85℃		℃
焊接温度/时间（Lead Soldering Temperature/Time）	TSOL	260℃≤6S		℃ /S

光电参数 (Initial Electrical Optical Characteristics) (Ta=25°C)

项目参数 Parameter	符号 Symbol	颜色 Color.	最小值 Min.	一般值 Typ.	最大值 Max.	单位 Unit.	测试条件 Test Conditions
发光强度 (Luminous Intensity)	I _v	R	/	500	/	mcd	IF=20mA
		G	/	10000	/		
主波长 (Dominant Wave Length)	λ _d	R	620	/	630	nm	IF=20mA
		G	515	/	530		
峰值波长 (Peak Wave Length)	λ _p	R	/	620	/	nm	IF=20mA
		G	/	525	/		
正向电压 (Forward Voltage)	V _F	R	1.8	/	2.4	V	IF=20mA
		G	2.6	/	3.4		
半波宽 (Half wave width)	Δλ	R/G	/	25	/	nm	IF=20mA
发光角度 (Viewing Angle)	2θ _{1/2}	R	/	45°	/	deg	IF=20mA
		G	/	45°	/		
反向电流 (Reverse Current)	I _R	R	/	/	5	μA	V _R =5V
		G	/	/	5		

备注 (Note) :

1. 此发光亮度为根据人眼对发光亮度之感应曲线之模拟发光强度符合CIE (国际光委会组织)

The luminous intensity is the simulated luminous intensity according to the response curve of human eyes to luminous intensity, which conforms to CIE (International Light Commission)

2. 此发光角度之测量为其发光亮度一半时所测试之数据

The measurement of the luminous angle is the data measured when the luminous brightness is half.

3. 发光亮度保证误差正负10%

Guaranteed error of luminous brightness is plus or minus 10%.

亮度分档:

Brightness grading:

代码 Code	最小值 Min	最大值 Max	单位 Unit	测试条件 Test conditions
A4	300	400	mcd	IF=20mA
A5	400	500		
A6	500	700		
A7	700	900		
B9	8000	10000		
C1	10000	12000		
C2	12000	14000		

电压分档:

Voltage grading:

代码 Code	最小值 Min	最大值 Max	单位 Unit	测试条件 Test conditions
N13-2	2.6	2.8	V	IF=20mA
N13-3	2.8	3.0		
N13-4	3.0	3.2		
N13-5	3.2	3.4		
N12-7	1.8	2.0		
N12-8	2.0	2.2		
N12-8	2.2	2.4		







波长分档:

Wavelength grading:

代码 Code	最小值 Min	最大值 Max	单位 Unit	测试条件 Test conditions
HG02	515	520	nm	IF=20mA
HG03	520	525		
HG04	525	530		
HR02	620	625		
HR03	625	630		

典型特性曲线


Typical Characteristics Curves

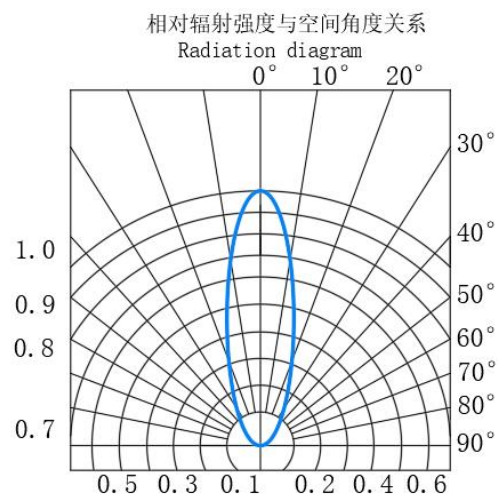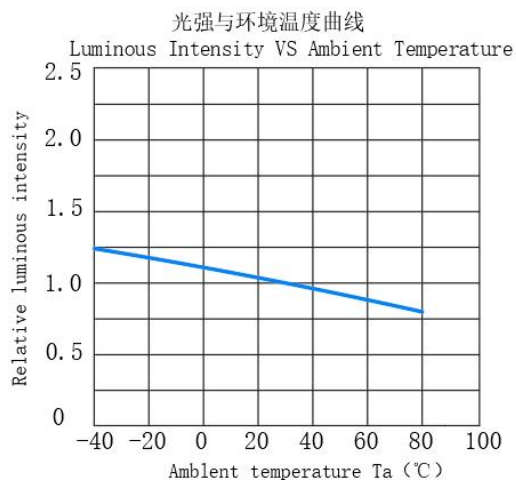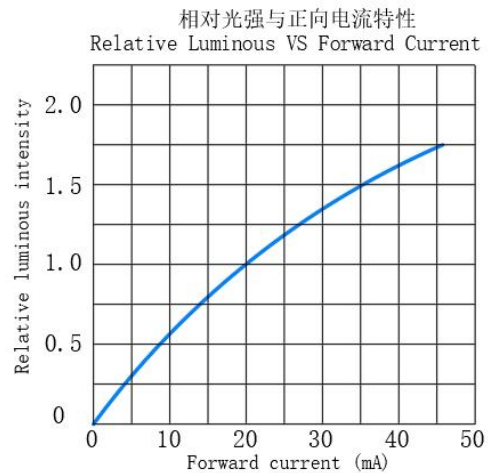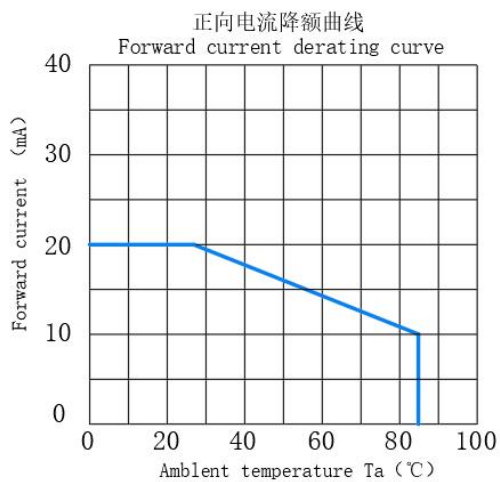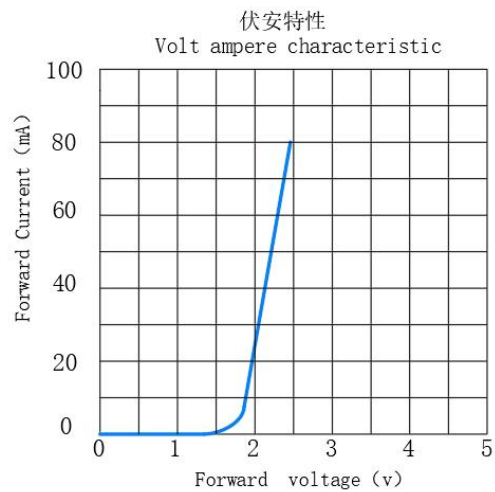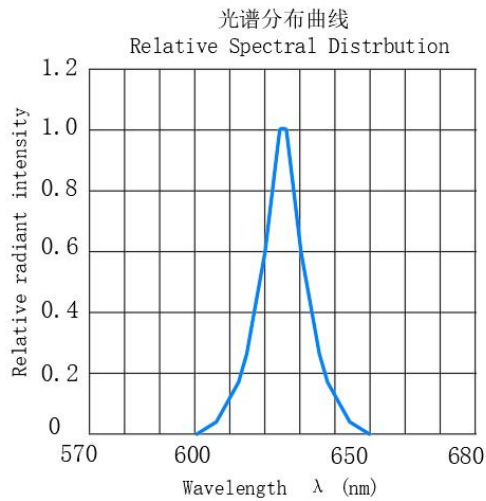

注：如无另外注明，测试环境温度为 $25 \pm 5^\circ\text{C}$./Note: If not otherwise indicated, the test environment temperature is $25 \pm 5^\circ\text{C}$.

典型特性曲线




Typical Characteristics Curves

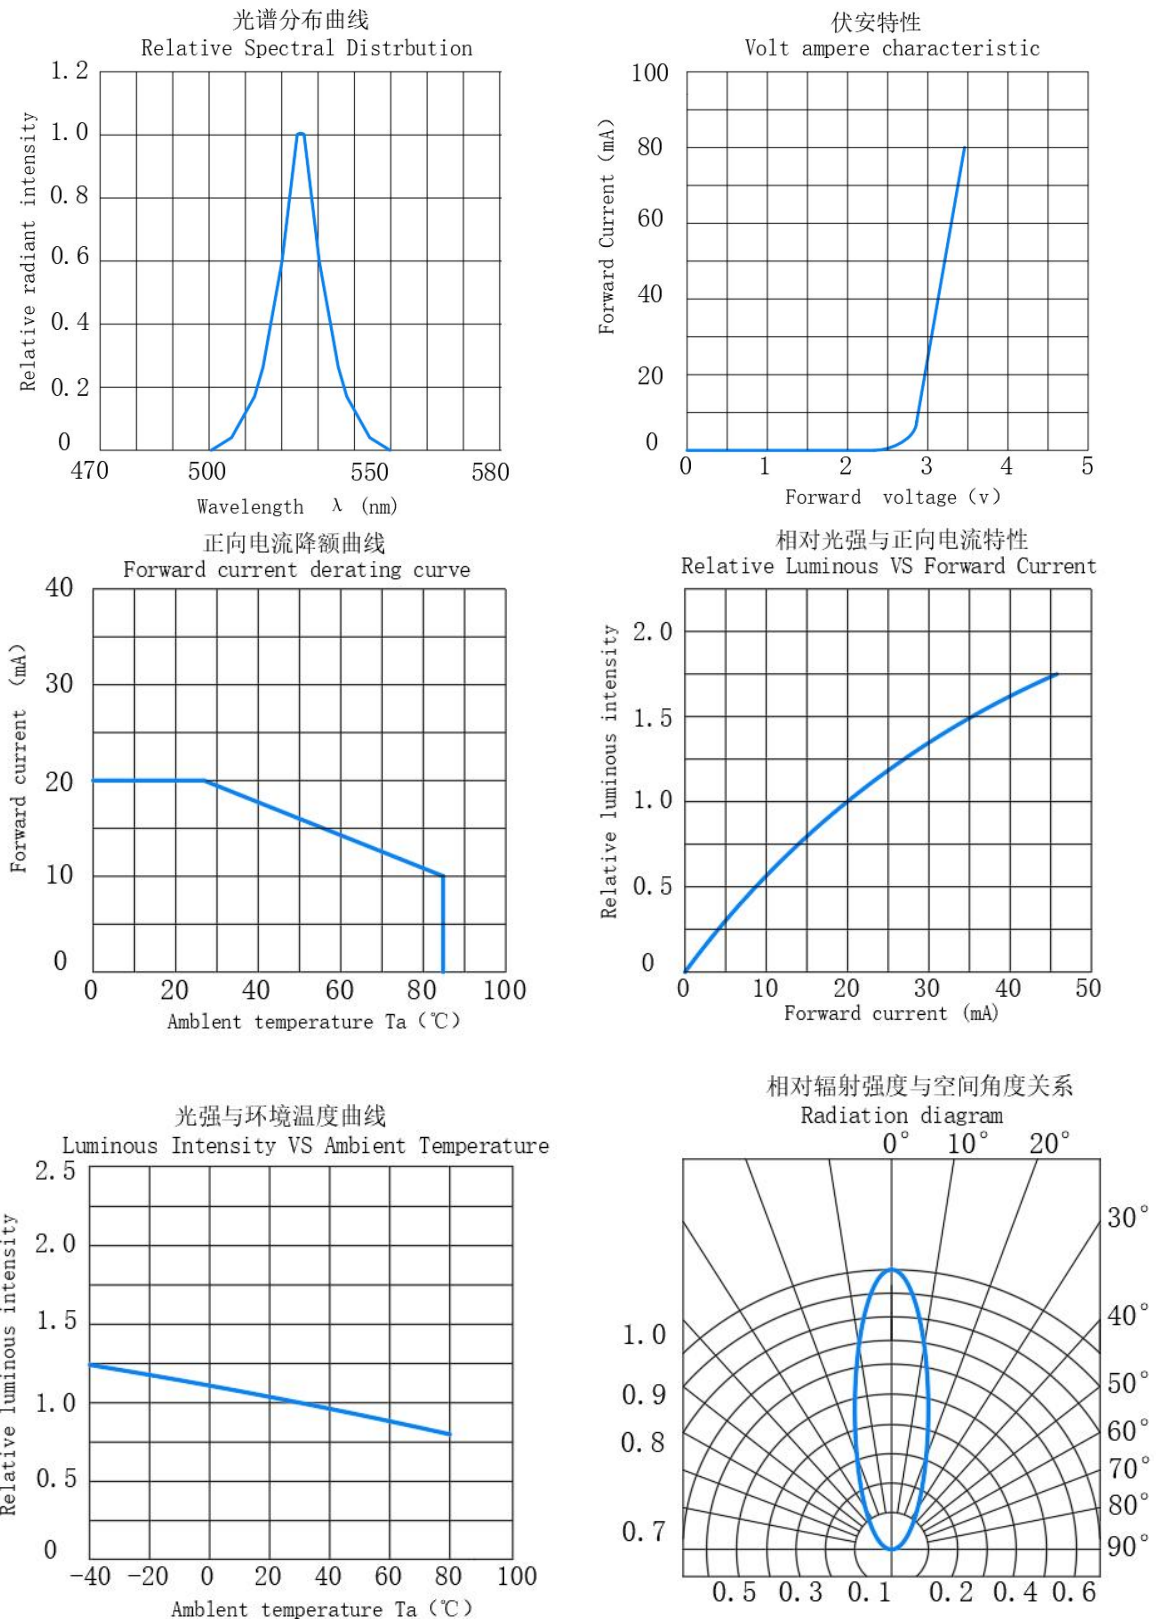

注：如无另外注明，测试环境温度为 $25 \pm 5^\circ\text{C}$./Note: If not otherwise indicated, the test environment temperature is $25 \pm 5^\circ\text{C}$.


外形尺寸

Outline Dimension

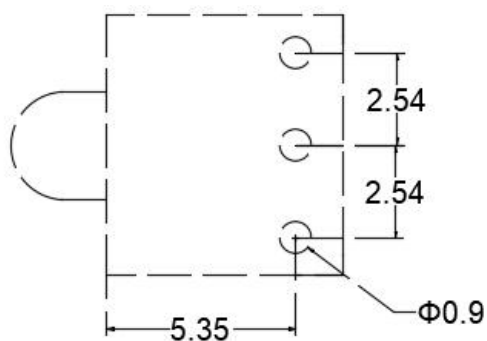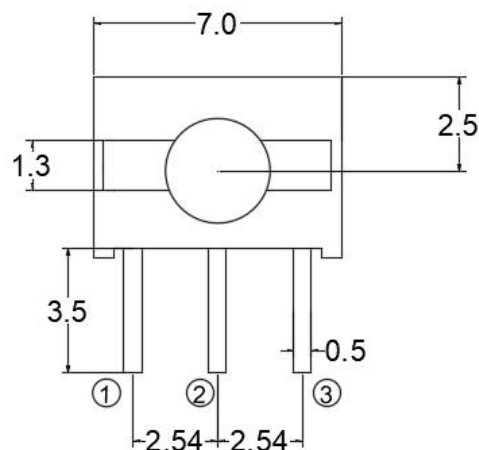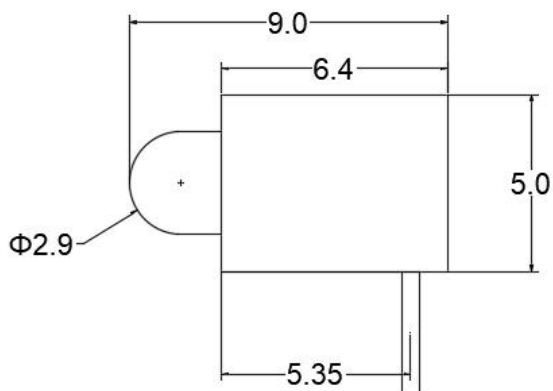

建议焊盘尺寸

Recommended Soldering Pattern



极性
Polarity

备注(Note):

1. 标注尺寸单位为毫米

Dimensions are in millimeters.

2. 除特别标注外, 所有尺寸允许公差 $\pm 0.25\text{mm}$.

Tolerances unless mentioned are $\pm 0.25\text{mm}$.

包装


Packaging

*袋装

In Bags

*防潮防静电包装

Moisture Proof and Anti-Electrostatic Foil Bag

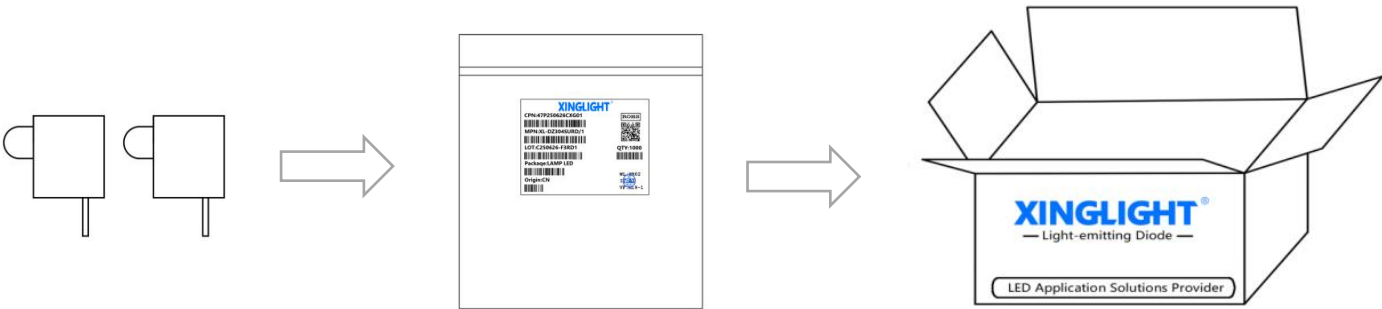

◇ 标签说明 Label Expantion

CPN: 批号/档位	LOT: 日期/封装颜色
MPN: 型号	VF: 电压代码
WL: 波长代码	IV: 亮度代码
ORIGIN: 产地	QTY: 数量
PACKAQE: 封装	

XINGLIGHT®

CPN:47P250626CXG01

MPN:XL-DZ304SURD/1

LOT:C250626-F3RD1

Package:LAMP LED

Origin:CN

ROHS



QTY:1000

WL:HR02

IV:PA3

VF:M19-1

使用注意事项 (1)

Precautions (1)

1、贮存:

Storage

* 贮存LED的环境，温度不超过30℃，相对湿度不超过70%。建议LED在原包装箱里日期不超过三个月 进行使用，如果需加长贮存时间，建议放在干燥箱内，并加放干燥剂， 或者充入氮气。

Storage environment of LED with temperature not exceeding 30°C and relative humidity not exceeding 70%.It is recommended that LDE be used in the original box for no more than three months. If longer storage time is required, put it in the drying box and add desiccant or filled with nitrogen.

2、静电:

Static Electricity

* 静电和电涌会导致产品特性发生改变，例如正向电压降低等，如果情况严重甚至会损毁产品。所以在使用时必须采取有效的防静电措施。

所有相关的设备和机器都应该正确接地，同时必须采取其他防止静电和电涌的措施。使用防静电手环，防静电垫子，防静电工作服、工作鞋、手套，防静电容器，都是有效的防止静电和电涌的措施；严禁使用普通塑料制品。建议在作业过程中，使用离子风扇来压制静电的产生。距离LED元件1英尺距离的环境范围内静电场电压小于100V

* Static electricity or surge voltage damages the LEDs. Damaged LEDs will show some unusual characteristic such as the forward voltage becomes lower, or the LEDs do not light at the low current. even not light.

All devices, equipment and machinery must be properly grounded. At the same time, it is recommended that wrist bands or anti-electrostatic gloves, anti-electrostatic containers be used when dealing with the LEDs.Using ordinary plastic products are strictly prohibited.It is recommended to use ion fans to suppress the static electricity generation during the operation.The static field voltage is less than 100V within the ambient range of 1 foot distance from the LED element.

使用注意事项 (2)

Precautions (2)

3、设计建议:


Design Consideration

* 设计电路时, 通过 LED 的电流不能超过规定的最大值, 同时, 还需使用保护电阻, 否则, 微小的电压变化将会引起较大的电流变化, 可能导致产品损毁。

建议使用以下 (A) 电路, 该电路能够很好的调节通过每个 LED 的电流; 不推荐使用 (B) 电路, 该电路在持续的电压驱动下, LED 的正向电压 (V_F) 发生变化, 电流会随之而发生变化, 可能使某些 LED 承受高于规定的电流值。

* In designing a circuit, the current through each LED must not exceed the absolute maximum rating specified for each LED. In the meanwhile, resistors for protection should be applied, otherwise slight voltage shift will cause big current change, burn out may happen.

It is recommended to use Circuit A which regulates the current flowing through each LED rather than Circuit B. When driving LEDs with a constant voltage in Circuit B, the current through the LEDs may vary due to the variation in Forward Voltage (V_F) of the LEDs. In the worst case, some LED may be subjected to stresses in excess of the Absolute Maximum Rating.

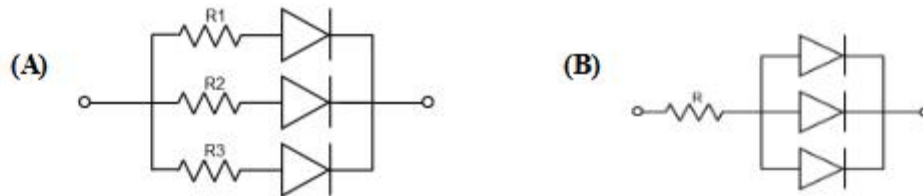

* LED 的特性容易因为自身的发热和环境的温度的改变而发生改变。温度的升高会降低 LED 的发光效率、影响发光颜色等, 所以在设计时应充分考虑散热的问题。

* Thermal Design is paramount importance because heat generation may result in the Characteristics decline, such as brightness decreased, Color changed and so on. Please consider the heat generation of the LEDs when making the system design.

使用注意事项 (3)


Precautions (3)

4、其他事项:

Others:

*直接用手拿取产品不但会污染封装树脂表面,也可能由于静电等因素导致产品性能的改变。过度的压力也可能直接影响封装内部的管芯和金线,因此请勿对产品施加过度压力,特别当产品处于高温状态下,例如在回流焊接过程中。

*When handling the product, touching the encapsulant with bare hands will not only contaminate its surface, but also affect on its optical characteristics. Excessive force to the encapsulant might result in catastrophic failure of the LEDs due to die breakage or wire deformation. For this reason, please do not put excessive stress on LEDs, especially when the LEDs are heated such as during Reflow Soldering.

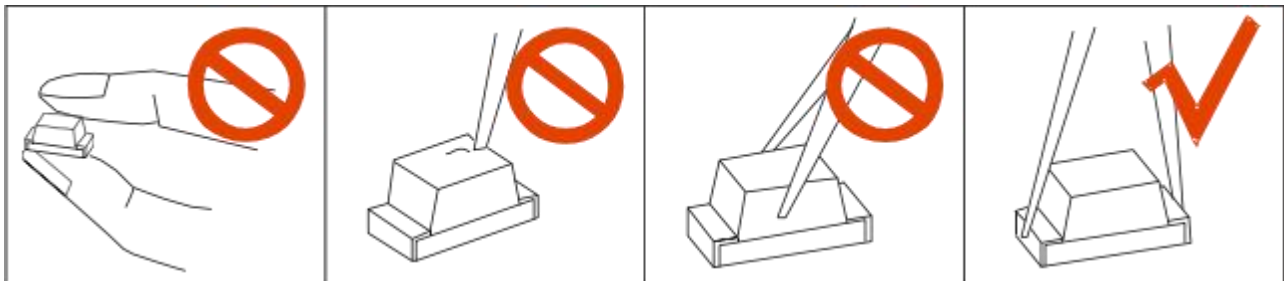

*LED 的环氧树脂封装部分相当脆弱,请勿用坚硬、尖锐的物体刮、擦封装树脂部分。在用镊子夹取的时候也应当小心注意。

*The epoxy resin of encapsulant is fragile, so please avoid scratch or friction over the epoxy resin surface. While handling the product with tweezers, do not hold by the epoxy resin, be careful.

5、眼睛保护忠告:

Safety Advice For Human Eyes

*LED 发光时,请勿直视发光光源,特别是对于一些光强较高的 LED,强光可能伤害你的眼睛。

*Viewing direct to the light emitting center of the LEDs, especially those of great Luminous Intensity, will cause great hazard to human eyes. Please be careful.

规格书如有修改,不另行通知

If there are any modifications to the specification sheet, no further notice will be given